

**NHS 757-U** (with Uni-directional element)

**NHS 757-O** (with Omni-directional element)



**Features :**


- Spectacular quality, perfect ambient noise control.
- Innovative design. Compact, lightweight.
- Multi-purpose. ideal for lecturers, traders, singing with dance, aerobics instructors, djs, performers, etc.

**SPECIFICATIONS**

Model No.	NHS 757-U	NHS 757-O
Polar Pattern	Uni-directional	Omni-directional
Frequency Response	70 Hz to 16,000 Hz	20 Hz to 20,000 Hz
Impedance	1,400Ω±30% (at 1K Hz)	1,500Ω±30% (at 1K Hz)
Sensitivity	- 62 dB±3 dB (0 dB=1V / microbar)	- 66 dB±3 dB (0 dB=1V / microbar)
Operating Voltage	1V~10V DC (RL : 2K2Ω)	

**DIMENSIONS :**

Capsule Housing	Ø9X9 mm	Ø4X11 mm
Boom	Ø1X90 mm	
Wire	Ø1.5X1.3M	

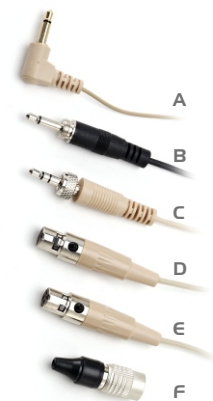

D= TA3F  
E= TA4F