

# NHS 787




### Features :

- Detachable headset accepting different types of gooseneck Microphone for Noise canceling or Uni-directional element.
- Comfortable wearing.
- Discreet slim boom : Ø 3.5mm

### SPECIFICATIONS

|                           |                                  |
|---------------------------|----------------------------------|
| Model No.                 | NHS 787                          |
| Element                   | Back Electret-Condenser          |
| Polar Pattern             | Cardioid                         |
| Frequency Response        | 100 Hz to 18,000 Hz              |
| Open Circuit Sensitivity  | - 65 dB±3dB (0 dB=1V / microbar) |
| Impedance                 | 1300Ω±30%                        |
| Maximum Input Sound Level | 120 dB SPL, 1 kHz at 1%T.H.D.    |
| Dynamic Range             | 84 dB, 1 kHz at Max SPL          |
| Signal-to-noise Ratio     | 58 dB , 1 kHz at 1Pa             |
| Operating Voltage         | 1.5V~10V DC (RL = 2000Ω)         |
| Accessory                 | Windscreen                       |

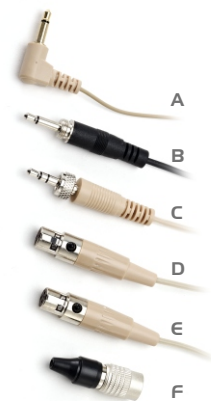

D= TA3F  
E= TA4F